



Etekcity Lasergrip 1080 Screen Replacement

The screen may be damaged and need to be replaced. You can remove it and replace it.

Written By: Carlos Pineda



INTRODUCTION

This guide will show you how to replace a faulty screen. This will use a screwdriver and a plastic opening tool. There are no hazards involved with this guide.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Pull the battery cover away from the handle by gripping near the thumb groove.

Step 2



- Gently pull the battery out of the handle.
- ⚠ Be careful with the wires as they are easily breakable.

Step 3



- Disconnect the battery by pulling the connector away from it.

- Positive first
- Negative second

⚠ When replacing the battery, this order is reversed.

Step 4 — Buttons



- Remove the battery cover off of the device by pulling it straight out.

Step 5



- Remove the two yellow covers from the device located on the front and rear with the plastic opening tool.


⚠ When removing the back cover, be careful not to lose the buttons as they are not connected.

Step 6



- Remove the two 3.1 mm Phillips #0 screws.


Step 7

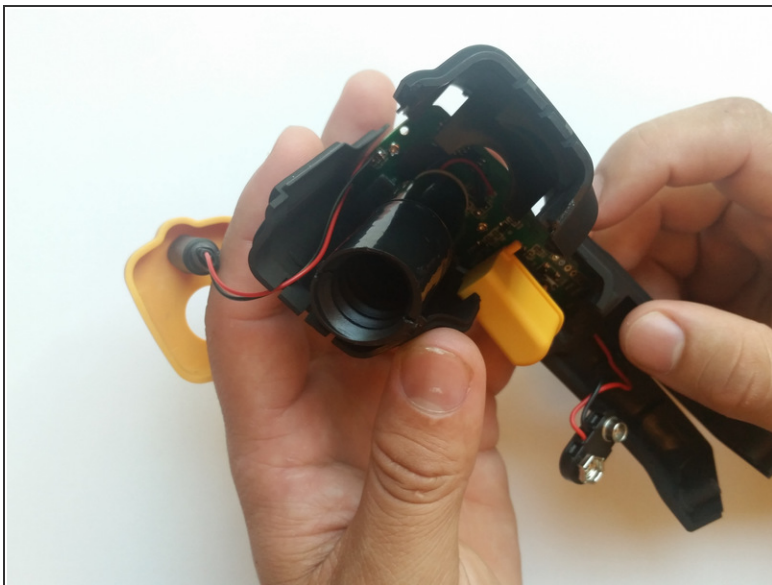

- Pull the two halves apart.



⚠ The components are loose on the inside so be careful not to lose any.

Step 8

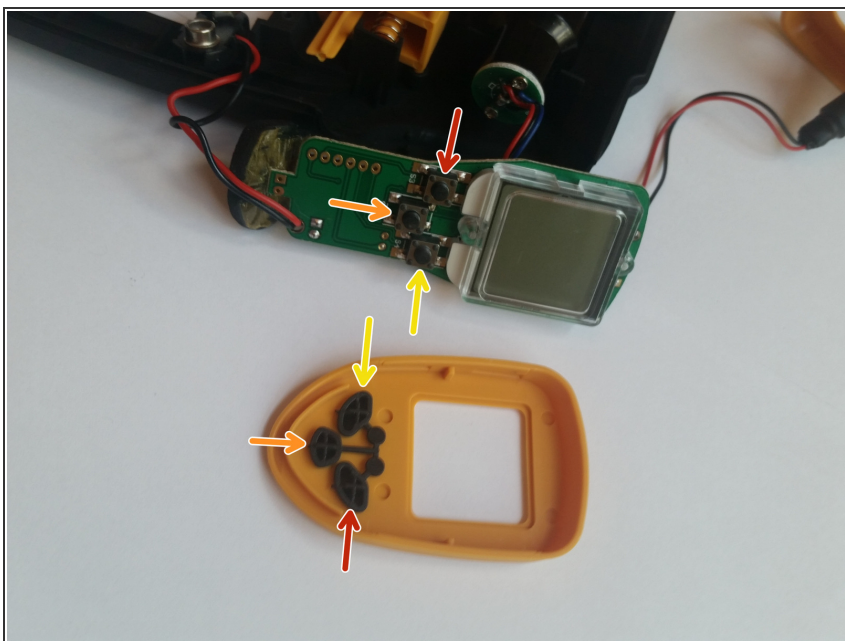

- Realign the buttons with the button terminals.
- ⓘ Red terminal to red button, orange terminal to orange button, yellow terminal to yellow button.


Step 9 — Etekcity Lasergrip 1080 Trigger Replacement

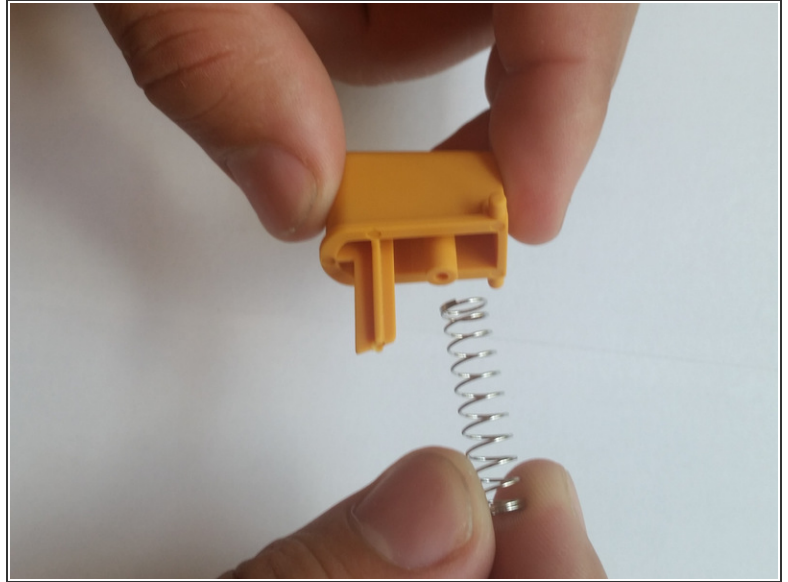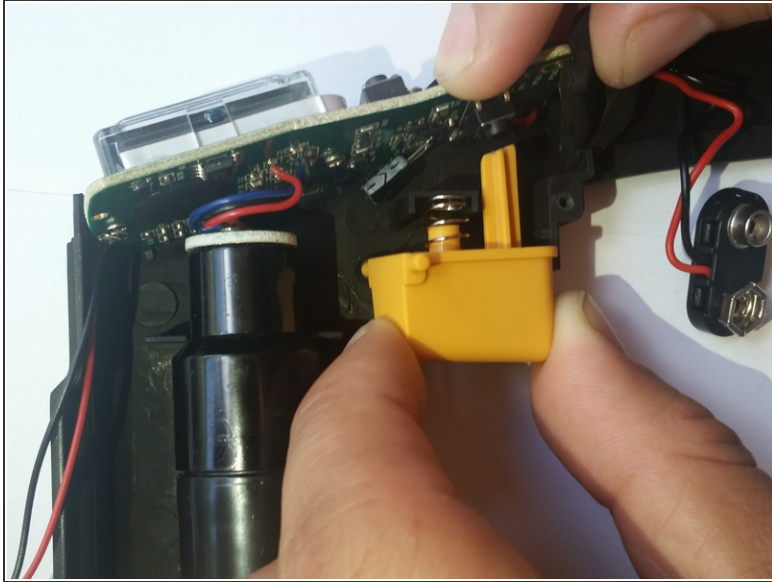

- Carefully pull the trigger out.



- ⚠ The trigger is spring loaded, so be careful that you do not lose the spring as you pull the trigger out.
- ℹ To put the trigger back in, align the peg with the hole in the handle and align the shaft with the button terminal.

Step 10 — Screen

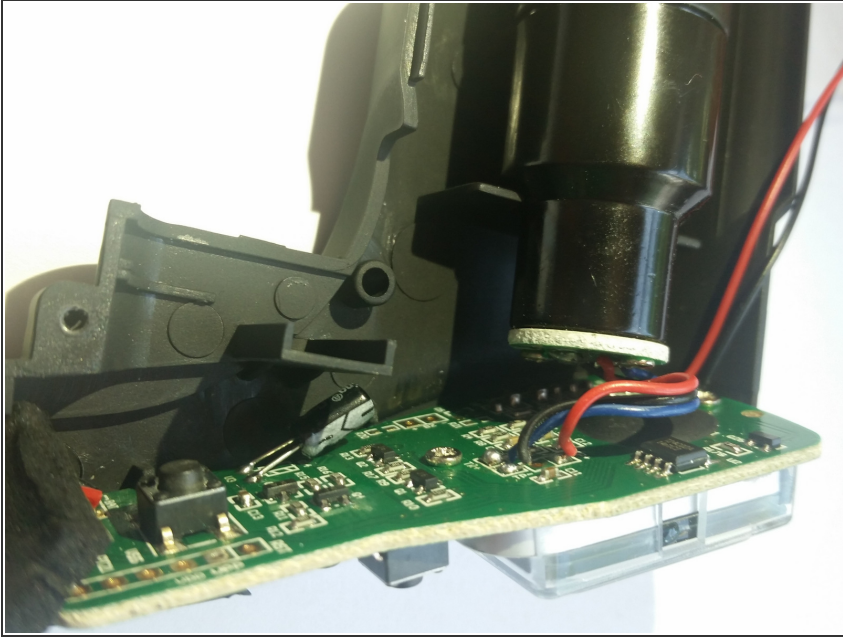


- Carefully pull the motherboard out of its slot in the body of the device.

Step 11

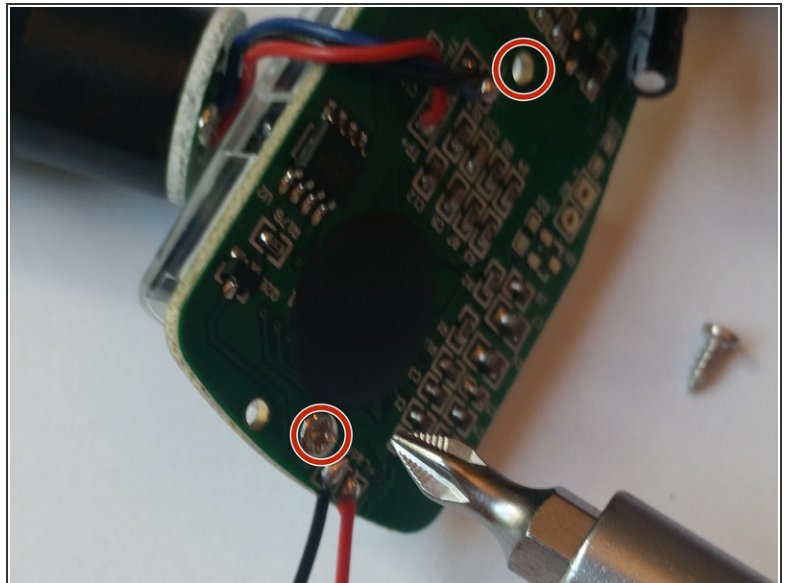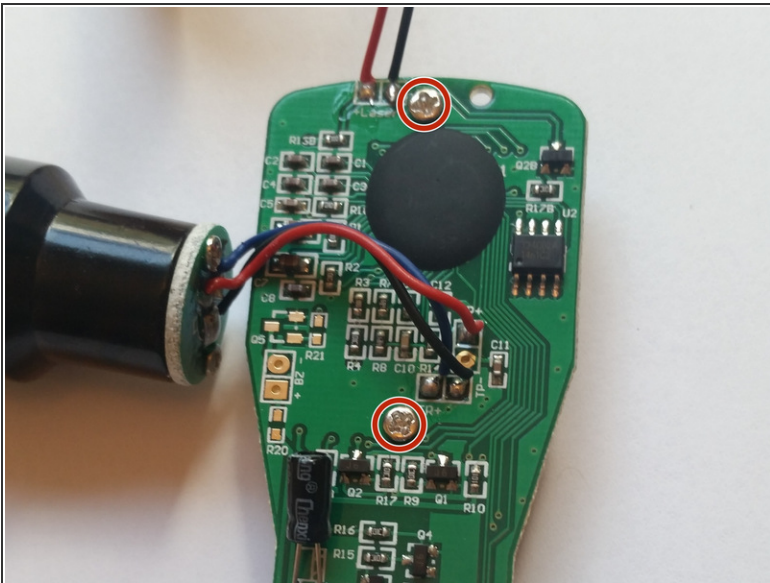


- Unscrew the two 3.4 mm screws on the motherboard.

Step 12

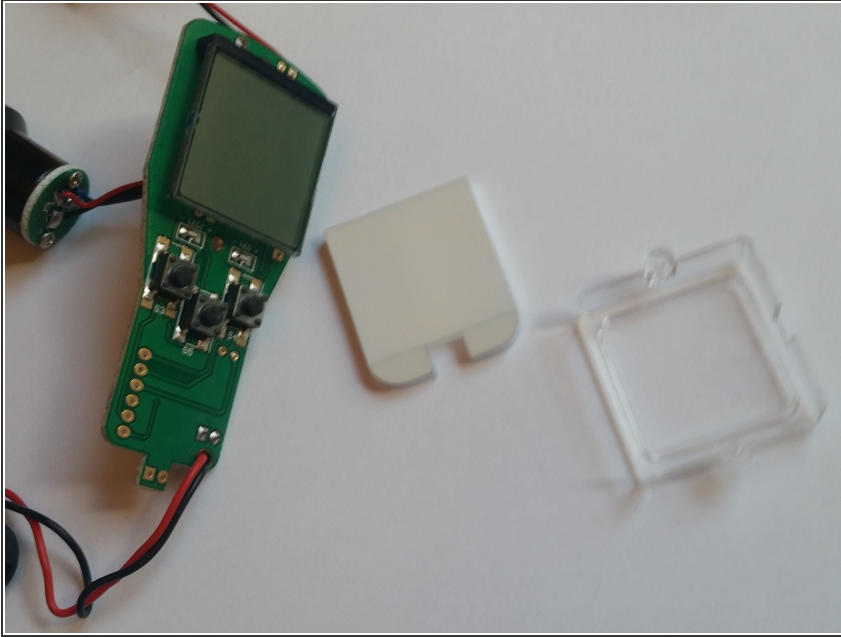

- Take off the cover and separate the parts.

 All of these parts are fragile and mishandling them may cause damage.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-04 02:24:49 PM.